

# SPN255

## 200 kg Modular Flaker

# SIMAG

Other models in this range: SPN125 - SPN405 - SPN605 - SPN1205

### Technical Features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production
- Refrigerant R404A

### 24 Hour Ice Production - 10°C/10° C

Air Cooled      200 kg

Water Cooled   205 kg

### Warranty

**2** years warranty on components

### Voltage

230/50/1 standard version

220-240/60/1 version available on demand



### Technology and Certifications



Certified ISO 9001:2008  
TOTAL QUALITY



Residual water content 25%



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SPN255

## 200 kg Modular Flaker



Other models in this range: SPN125 - SPN405 - SPN605 - SPN1205

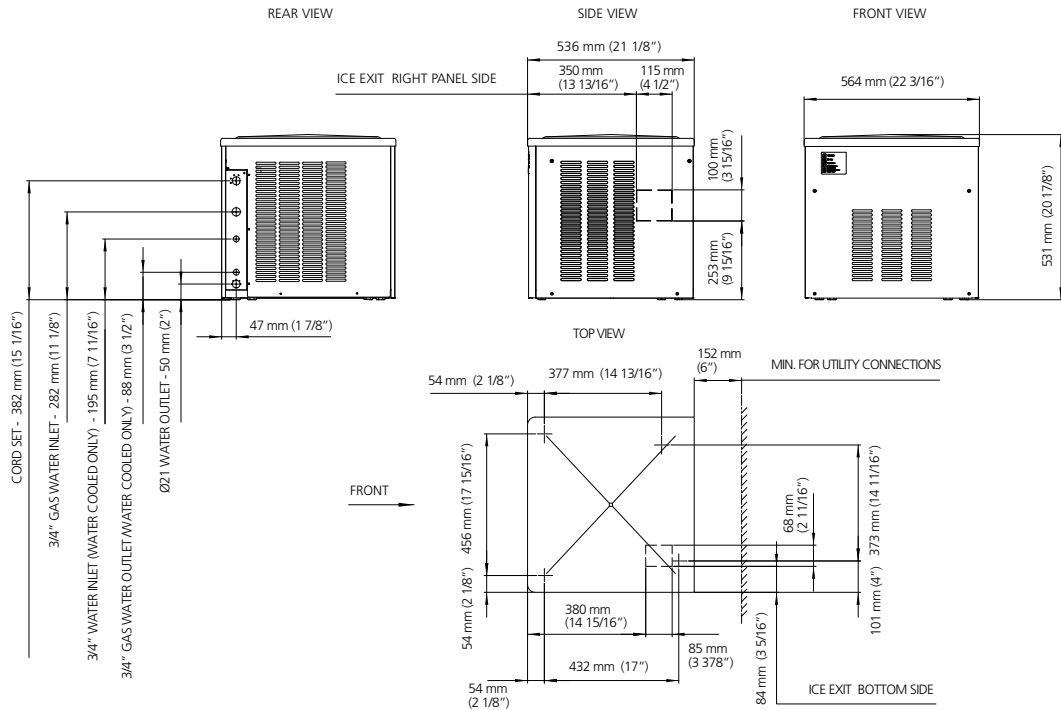

### Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SPN 255 AS	230/50/1	700	R404A	0,48	10	6,5	49	56
SPN 255 AS	220-240/60/1	n.a.	R404A	n.a.	10	n.a.	49	56
SPN 255 WS	230/50/1	650	R404A	0,26	10	108	49	56
SPN 255 WS	220-240/60/1	n.a.	R404A	n.a.	10	n.a.	48	56

(\*) Power Input: at 43°C Ambient Temperature  
 (\*\*) Water Consumption: at 32°C Air and 21°C Water